

HP ProLiant ML110 Generation 9 (Gen9)

The HP ProLiant ML110 Gen9 Server is a 1P/4.5U affordable single-socket tower server featuring better performance, expansion, and growth than previous 1P single-socket tower models. Designed to meet small and midsized businesses' performance compute demands the ML110 Gen9 delivers exceptional value at an affordable price.

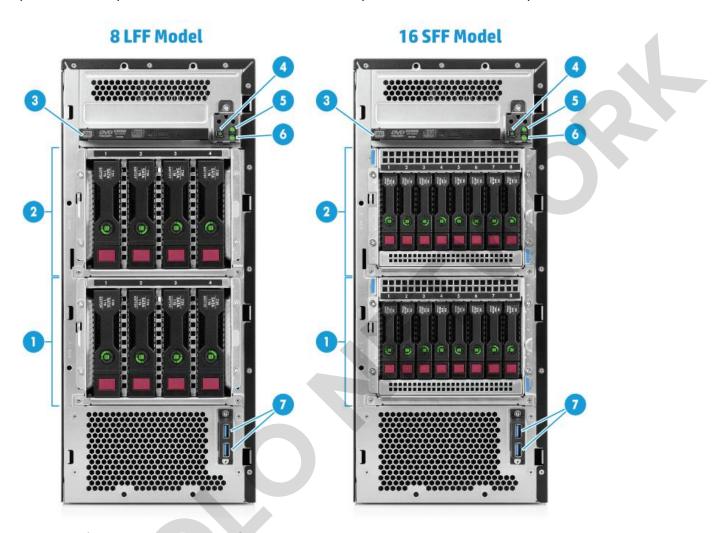

Front View (details for 8LFF and 16SFF)


- Drive cage 1.
- 2. Drive cage
- Optical drive (optional) 3.
- 4. Power button/LED
- Health LED 5.
- **NIC status LED** 6.
- 7. USB 3.0 (2) connectors

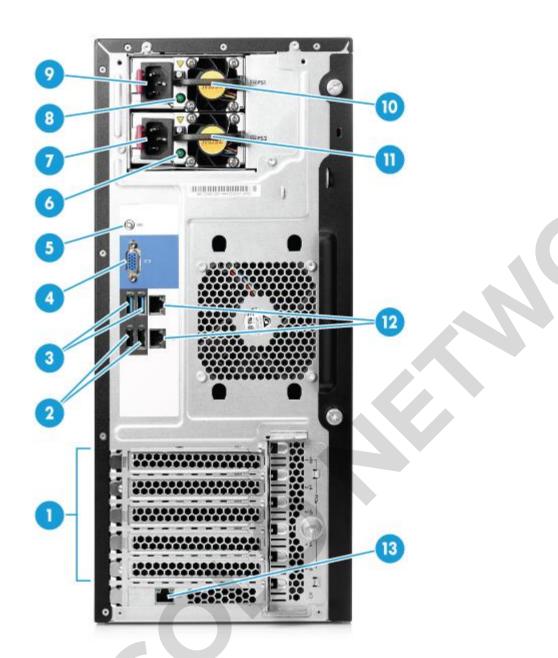

Rear View

- 1. PCIe3 Slots (Slots 1-5)
- 2. USB 2.0 (2) connectors
- 3. USB 3.0 (2) connectors
- 4. Video connector
- 5. UID button/LED
- Power supply 2 LED 6.
- 7. Power supply 2 power connection
- 8. Power supply 1 LED
- 9. Power supply 1 power connection

- 10. Power Supply 1 bay
- 11. Power Supply 2 bay
- 12. Network RJ-45 ports (2)
- 13. HP ML Gen9 dedicated iLO port kit (optional)

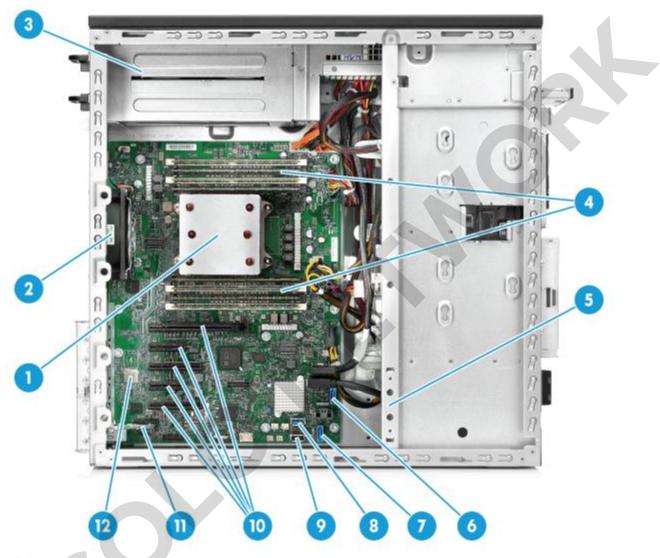

Internal View

- 1. One (1) processor and heatsink with HP Smart Socket
- System Fan (92x32mm default), upgrade system 2. fan(92x38mm) is required for 140W E5-1600v3 Processor and SAS SSD
- Power Supply backplane cage 3.
- Eight (8) DDR4 DIMM slots 4.
- PCIe fan (option required to support PCIe expansion cards) 5.
- Front USB 3.0 connector 6.
- 7. SATA connector 1
- 8. Internal USB 3.0 connector

- Internal USB 2.0 connector
- 10. Five (5) PCIe3 expansion slots
- 11. Dedicated iLO module slot (optional)
- 12. MicroSD slot



NOTE: For more information regarding Intel Xeon processors, please see the following http://www.intel.com/xeon.

Processor

One of the following depending on model

| Model | CPU | Cores | L3 Cache | Power | QPI | DDR4 Hz |
|------------|-----------|-------|----------|-------|---------|---------|
| | frequency | | | | | |
| E5-2660v3 | 2.6GHz | 10 | 25MB | 105W | 9.6GT/s | 2133 |
| E5-2640v3 | 2.6GHz | 8 | 20MB | 90W | 8.0GT/s | 1866 |
| E5-2630Lv3 | 1.8GHz | 8 | 20MB | 55W | 8.0GT/s | 1866 |
| E5-2623v3 | 3.0GHz | 4 | 10MB | 105W | 8.0GT/s | 1866 |
| E5-2620v3 | 2.4GHz | 6 | 15MB | 85W | 8.0GT/s | 1866 |
| E5-2609v3 | 1.9GHz | 6 | 15MB | 85W | 6.4GT/s | 1600 |
| E5-2603v3 | 1.6GHz | 6 | 15MB | 85W | 6.4GT/s | 1600 |
| E5-1650v3 | 3.5GHz | 6 | 15MB | 140W | 0.0GT/s | 2133 |
| E5-1620v3 | 3.5GHz | 4 | 10MB | 140W | 0.0GT/s | 2133 |
| E5-1603v3 | 2.8GHz | 4 | 10MB | 140W | 0.0GT/s | 1866 |

NOTE: Up to 1 processor supported. Mixing different processor models is not supported.

Cache Memory

One of the following depending on model

10MB (1 x 10MB) Level 3

NOTE: For Four-core processors.

15MB (1 x 15MB) Level 3 **NOTE:** For Six-core processors. 20MB (1 x 20MB) Level 3

NOTE: For Eight-core processors.

30MB (1 x 30MB) Level 3 **NOTE:** For Ten-core processors.

Chipset

Intel® C610 Series Chipset

Intel® E5-2600v3 Processor Family

Intel® E5-1600v3 Processor

NOTE: This is a 140W processor which need to order with the ML110 Gne9 System fan upgrade kit -

789654-B21.

NOTE: For more information regarding Intel® chipsets, please see the following URL:

http://www.intel.com/products/server/chipsets/.

On System Management Chipset

HP iLO (Firmware HP iLO4 2.1) 2GB NAND

NOTE: 1GB USB user space configurable via UEFI and accessible via iLO. Read and learn more in the

iLO QuickSpecs.

Memory

Type:

HP SmartMemory

DDR4 Registered (RDIMM) or Load Reduced (LRDIMM)

DIMM Slots Available 8 (8 DIMM slots per processor, 4 channels per processor, 2 DIMMs

per channel)

Maximum Capacity

128GB

(8 x 16GB LRDIMM @2133MHz)

(LRDIMM)

Maximum Capacity 256GB

(8 x 32GB RDIMM @2133MHz)

(RDIMM)

NOTE: This server does not support mixing LRDIMMs or RDIMMs. Attempting to mix any combination of

these DIMMs can cause the server to halt during BIOS installation.

Memory Protection Advanced ECC

Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.

Online spare

Memory online spare mode detects a rank that is degrading and switches

operation to the spare rank.

Network Controller Broadcom 5717C0 Dual-port 1Gb

Expansion Slots

| Expansion Slots # | Technology | Bus Width | Connector Width | Bus Number | Form Factor | Notes |
|-------------------|------------|-----------|--------------------|---------------|--|-----------------|
| 5 | PCIe 3.0 | x8 | x8 | | Full-height, half- length slot | For processor 1 |
| 4 | PCIe 3.0 | х4 | x4 | | Full-height, half- length slot | For processor 1 |
| 3 | PCle 3.0 | x8 | x8 | | Full-height, half- length slot | For processor 1 |
| 2 | PCle 3.0 | х4 | x4 | | Full-height, half- length slot | For processor 1 |
| 1 | PCIe 3.0 | x16 | x16 | | Full-height, ¾ length (up to 9.5") Slot | For processor 1 |

NOTE: Bus number - Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number.

NOTE: Five total expansion PCIe 3.0 slots. One PCIe 3.0 x16 (x16 speed); Two PCIe 3.0 x 8 (x8 speed); Two PCIe 3.0 x 4 (x4 speed).

| Expansion Slots # | Technolog y | Bus Width | Connector Width | Bus Number | Device Number | Form Factor | Notes |
|-------------------|----------------|-----------|--------------------|---------------|------------------|---------------------------|-------|
| 6 | HP ML Gen9 | x1 | x1 | | | Dedicate for ML Series | |
| | Dedicated | | | | | | |
| | iLO Port Kit | | | | | | |

Storage Controller Entry Models

depending on model

HP Dynamic Smart Array B140i Controller

One of the following NOTE: B140i can't mix with any standup internal controller.

Base Models HP Dynamic Smart Array B140i Controller

NOTE: B140i can't mix with any standup internal controller.

Internal Storage Devices

One of the following depending on model

Optical Drive

Optional SATA 9.5mm DVD-ROM Optical Drive Optional SATA 9.5mm DVD RW Optical Drive **NOTE:** Optical is optional in BTO models.

Hard Drives None ship standard

Hard Drive Bays Up to 4 Non-hot plug SATA 3.5" drives

NOTE: Mixing drive cage types is not allowed.

NOTE: All Pre-configured Models come populated with hard drive blanks installed. The 4LFF configurations includes 3 blanks and 8SFF includes 7 blanks. Additional hard drive blanks can be ordered using either P/N 666986-B21 for the HP LFF HDD Blank Kit or P/N 666987-B21 for the HP SFF HDD Blank Kit. These part numbers for single HDD blanks below are also provided should you require replacement HDD blanks for your server.

NOTE: NHP SATA is limited to B140i controller.

(4) Hot plug LFF SAS/SATA HDD bays; upgradable to (8)

(8) Hot plug SFF SAS/SATA HDD bays: upgradable to (16)

NOTE: 16SFF is limited to P840 controller.

NOTE: H240 8LFF/8SFF require 2 cable kit P/N: 784606-B21. **NOTE:** P84016SFF require 2 cable kit P/N: 784608-B21.

| Maximum Internal | | CAPACITY | CONFIGURATION |
|------------------------------|-----------------------|----------|---------------|
| Storage One of the following | Hot Plug LFF SAS | 48TB | 8x6TB |
| | Hot Plug LFF SATA | 48TB | 8x6TB |
| aepenaing on | Hot Plug SFF SAS | 19.2TB | 16x1.2TB |
| model | Hot Plug SFF SATA | 16TB | 16x1TB |
| | Non-Hot Plug LFF SATA | 16TB | 4x4TB |
| | Hot Plug LFF SAS SSD | 12.8TB | 8x1.6TB |
| | Hot Plug LFF SATA SSD | 12.8TB | 8x1.6TB |
| | Hot Plug SFF SAS SSD | 25.6TB | 16x1.6TB |
| | Hot Plug SFF SATA SSD | 25.6TB | 16x1.6TB |
| | | | |

Power Supply

HP 350W ATX-Gen9 Power Supply FIO Kit

One of the following HP 550W ATX-Gen9 Power Supply Kit

depending on model HP 750W CS Gold Ht Plg Pwr Supply Kit

NOTE: The first 750W CS Gold Ht Plg Pwr Supply Kit requires the RPS Enablement Kit.

NOTE: The RPS Enablement kit will support two power supplies.

HP Entry-Level Power Supplies provide lower-cost options for customers trying to balance their need for enterprise class efficiency and reliability while maintaining lowest possible hardware costs. All Entry-Level power supply options have been designed specifically for HP ProLiant Gen9 Essential Series servers.

The HP 550W FIO Power Supply is the standard, non-redundant AC power supply option for most HP ProLiant Gen9 Essential servers. It features Silver-level (89%) certified power efficiency with a set of features optimized for the Gen9 Essential-series rack and tower servers.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the ProLiant Power Cables web page.

To review the power requirements for your selected system, please use the HP Power Advisor Tool located at http://www.hp.com/go/hppoweradvisor.

Power specifications and technical content for all HP Server power supplies can be found at http://www.hp.com/go/proliant/powersupply.

| System Fans One of the following depending on model | 1P model NOTE: One (1) Non-hot plug, nor | Non-redundant 2 fans n-redundant fans ship as standard. | Redundant NA |
|--|---|---|----------------------------|
| Interfaces | Video | 1 (rear) | |
| 1 | Network RJ-45 (Ethernet) | 2 | |
| | HP iLO Remote Management Network Port | 1GbE Optional Port | |
| | Micro SD Slot | 1 (internal) | |
| | | hot-pluggable device. Customers sho slot while the server is powered. | uld not attempt to plug an |
| | USB 3.0 | 5 (2 rear, 1 internal, 2 front) | |
| | USB 2.0 | 3 (2 rear, 1 internal) | |

QUITCKSpecs (21) 4062-6971 (31) 4062-6971 (41) 4062-6971 (48) 4062-6971 (51) 4062-6971 (61) 4062-6971 (71) 4062-7479

Standard Features

and Virtualization **Software Support** for ProLiant Servers

Operating Systems Microsoft Windows Server

Canonical Ubuntu

Red Hat Enterprise Linux (RHEL) SUSE Linux Enterprise Server (SLES)

VMware

NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: http://www.hp.com/go/ossupportand our driver download page http://www.hp.com/support/ML110Gen9.

Upgradeability

Up to 16 SFF Hard Drive Bays, Or 8 LFF Hard Drive Bays

Up to 8 DIMM slots Redundant Power Supply Optional optical drive (up to 1)

Industry Standard Compliance

ACPI 2.0b Compliant PCIe 3.0 Compliant PXE Support

WOL Support Novell Certified

IPMI 2.0, SMASH CLP, DCMI 1.0 compliant

Microsoft® Logo certifications

USB 3.0 Support SMBIOS 2.7.1 ASHRAE A3

Graphics

16 bit color: maximum resolution of 1600 x 1200

Integrated Matrox G200 video standard

32 bit color: maximum resolution of 1280 x 1024

- 16 MB Flash
- 128 MB DDR3

HP Server UEFI/Legacy ROM

HP Server UEFI /Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration while interacting with your server at boot time. HP ProLiant Gen9 platform defaults to UEFI and can be factory or field configured for Legacy BIOS Boot Mode. NOTE: The UEFI System Utilities function is analogous to the HP ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit http://www.hp.com/go/proliantuefi/docs.

UEFI enables numerous new capabilities specific to HP ProLiant servers such as:

- **Secure Boot**
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- **Embedded UEFI Shell**
- Mass Configuration Deployment Tool using HP RESTful API.

Standard Features

- PXE boot support for IPv6 networks
- Boot support for option cards that only support a UEFI option ROM

For more information please visit http://www.hp.com/go/proliant/uefi.

NOTE: For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

NOTE: HP Legacy FIO Mode Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory.

Form Factor

Tower (4.5U)

NOTE: Sliding Shelf - 234672-B21 is optional to support rack form factor.

Embedded Management

HP Integrated

Monitor your servers for ongoing management, service alerting, reporting and **Lights-Out (HP iLO)** remote management with HP iLO. Learn more at http://www.hp.com/go/ilo.

UEFI

Configure and boot your servers securely with industry standard Unified

Extensible Firmware Interface (UEFI). Learn more at http://www.hp.com/go/ProLiant/uefi.

RESTful API is an application programming interface. RESTful Web Service API served by iLO's web server: Learn more at http://www.hp.com/go/restfulapi.

Intelligent **Provisioning**

HP RESTful API

Provision servers by discovering and deploying 1 to few servers with Intelligent Provisioning. Learn more at http://www.hp.com/go/intelligentprovisioning.

Support

Embedded Remote HP's embedded remote support, when used with Insight Online direct connect or HP Insight Remote Support, allows HP ProLiant servers to transmit hardware events directly to HP or an HP Authorized Partner for automated phone home support. Learn more at http://www.hp.com/go/insightonline/info.

Server utilities

HP Smart Update

Optimize firmware and driver updates with HP Smart Update solutions. Learn more at http://www.hp.com/go/smartupdate.

Manager (HP SIM)

HP Systems Insight HP SIM allows you to monitor the health of your HP ProLiant Servers and HP Integrity Servers, and also provides you with basic support for non-HP servers. HP SIM also integrates with HP SUM to provide guick and seamless firmware updates. Learn more at http://www.hp.com/go/sim.

Scripting Tool Kit and Windows **PowerShell**

Provision 1 to many servers using your own scripts to discover and deploy them with HP Scripting Tool Kit for Windows and Linux or HP Scripting Tools for Windows PowerShell. Learn more at

http://www.hp.com/go/ProLiantSTK orhttp://www.hp.com/go/powershell.

HP RESTful Interface Tool HP RESTful Interface tool is a scripting tool to provision servers using RESTful API Interface to discover and deploy servers at scale. Learn more at

http://www.hp.com/go/restfulapi.

HP iLO Mobile Application

Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional

information please visit: http://www.hp.com/go/ilo/mobileapp.

HP Insight Online

HP Insight Online, available at no additional cost as part of your HP warranty, Care Pack or contractual support agreement with HP, is a personalized

dashboard for simplified tracking of IT operations and support information from anywhere, anytime. Learn more at http://www.hp.com/go/insightonline/info.

NOTE: The Service Pack for ProLiant (which includes HP SUM) can be downloaded from http://www.hp.com/go/spp/download. More information can be found: http://www.hp.com/go/SmartUpdate, http://www.hp.com/go/spp and

www.hp.com/go/hpsum.


Security

Power-on password Setup password Serial interface control Power switch security Administrator's password **TPM 1.2** UEFI

Warranty

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: Server Warranty includes 3-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html.



QUICKSpecs (21) 4062-6971 (31) 4062-6971 (41) 4062-6971 (48) 4062-6971 (51) 4062-6971 (61) 4062-6971 (71) 4062-7479

Optional Features

| Embedded |
|------------|
| Management |

iLO Essentials

HP iLO Essentials is the preferred license for small and medium business that offers full remote server management capabilities for small and medium business via the Integrated Remote Console (IRC), virtual media, and e-mail based alerts. Learn more about HP iLO Essentials at http://www.hp.com/go/iLO/essentials.

iLO Scale-Out

HP iLO Scale-Out is the preferred license built for web hosting, cloud service providers, and high performance computing data centers, managing massive scale out environments. This license offers sophisticated scripting tools that provides remote access through Text Console via SSH, Dynamic power capping, Email-based Alerting and proactive notifications. For more information, visit http://www.hp.com/go/iLO/scale-out.

iLO Advanced

HP iLO Advanced licenses offer smart remote functionality without compromise, for all HP ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HP iLO Advanced at http://www.hp.com/go/iloadvanced.

Server Management

HP Insight Control

HP Insight Control, lets you deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see http://www.hp.com/go/insightcontrol.

High Performance Clusters

HP Insight Cluster Management Utility (CMU) is an HP-licensed and HP-supported suite of tools that are used for lifecycle management of hyperscale clusters of Linux ProLiant systems. CMU includes software for the centralized provisioning, management and monitoring of nodes. CMU makes the administration of clusters user friendly, efficient, and effective. http://www.hp.com/go/cmu.

HP Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPC Server. A Cluster Platform Configurator simplifies ordering. http://www.hp.com/go/clusters.

HPC Interconnects

NOTE: High Performance Computing (HPC) interconnect technologies are available for this server under the HP Cluster Platform product portfolio. These high-speed interconnects are fully supported by HP when they are part of these configure to order clusters. Solutions can be defined with a lot of flexibility with the help of configuration tools. Please visit the following URL to configure HPC Clusters with InfiniBand Interconnects: http://www.hp.com/techservers/clusters/ucp/index.html.

Storage Software

Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than HP storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities.

Storage software that gets the job done:

Data Protection and Recovery Software

Whether you're a large enterprise or a smaller business, HP data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.

Data Archive and Migration Software

HP's storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.

Optional Features

Storage Resource Management Software (SRM)

HP's storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.

Data Replication Software

HP offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.

Storage Device Management Software

Maximize your investment in HP storage and networking with software that enables hardwarespecific configuration, performance tuning and connectivity management.

HP StoreVirtual VSA

With HP StoreVirtual VSA you can use the power of virtualization to create a virtual array within your host server. Manage it as a single pool of shared storage capacity, and scale it to match your evolving needs. HP ProLiant Gen9 servers include a 3-year limited license for HP StoreVirtual VSA software with 1TB of capacity at no extra cost. Simply select to install HP StoreVirtual VSA software during server setup within Intelligent Provisioning. More information, instructional videos, and free console management software are available at http://www.hp.com/go/vsa1TB.

NOTE: For more information about Storage Software including QuickSpecs, please see: http://www.hp.com/go/storage/software.

(SCE)

One Config Simple SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact HP's Customer Business Center or an Authorized Partner for assistance. http://www.hp.com/products/configurator.

Service and Support

Service and Support HP Technology Services for Industry Standard Servers

HP Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to HP to help prevent problems and solve issues faster. Our support technology lets you to tap into the knowledge of millions of devices and thousands of experts to stay informed and in control, anywhere, any time.

Protect your business beyond warranty with HP Care Pack Services

HP Care Pack Services enable you to order the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement for the term you select.

Optimized Care

Supports maintaining servers at optimum performance availability

HP Proactive Care with 24x7 coverage, three year Care Pack Service

HP Proactive Care helps prevent problems and stabilize IT by utilizing secure, real-time, predictive analytics and proactive consultations when your products are connected to HP. This Care Pack Service combines three years' proactive reporting and advice with our 24x7 coverage and enhanced escalation management, four hour hardware response time and two hour call back for software questions on leading industry standard software running on your HP ProLiant server.

http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf

Standard Care Package

Supports maintaining high level of server availability

Foundation Care 24x7, three-year Care Pack Service

HP Foundation Care 24x7 connects you to HP 24 hours a day, seven days a week for assistance on resolving issues. Hardware onsite response within four hours if needed; collaborative software included in this Care Pack service provides troubleshooting assistance on industry leading software running on your HP server. Simplify your support experience and make HP your first call for hardware or software

http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en

Related Services

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner. http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf

Factory Express for Servers and storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed. For more information on Factory Express services for your specific server model please contact your sales representative or go to: http://www.hp.com/go/factory-express.

Data Privacy Services

Protect your data through better media management. HP Data privacy services help manage and protect sensitive data to reduce the risk of unauthorized access to private information and help meet compliance requirements. Our retention services allow you to keep drives and other devices upon failure, our removal services provide convenient data sanitization and our recovery services allow you to safely retire IT assets and capture any remaining value from the hardware. http://www.hp.com/services/dataprivacy

Additional HP Care Pack services can be found at: http://www.hp.com/go/cpc.

to improve your

Get connected to HP Prevent problems with innovative, automated monitoring tools and proactive services. Combining Proactive Care Services with our remote support technology such as Insight Online provides you with support experience expert advice and personalized, cloud-based automated IT support, helping to prevent unplanned down time and solve problems quickly. For more information, visit:

http://www.hp.com/go/proactiveinsightexperience

Service and Support

HP Support Center

Personalized online support portal with access to information, tools and experts to support HP business products. Submit support cases online, chat with HP experts, access support resources or collaborate with peers. Learn more http://www.hp.com/go/hpsc.

HP's Support Center Mobile App** allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime. HP Insight Remote Support and HP Support Center are available at no additional cost with a HP warranty, HP Care Pack or HP contractual support agreement.

** HP Support Center Mobile App is subject to local availability.

Parts and Materials HP will provide HP-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

> Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HP due to malfunction.

For more information

To learn more on HP ProLiant servers, please contact your HP sales representative or HP Authorized Channel Partner or visit: http://www.hp.com/services/proliant.

Pre-configured Models

For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

- 1. Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.
- 2. HP does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped
- 3. If you desire a custom configuration please see "Configuration Information Factory Integrated Models" section of this QuickSpecs.
- 4. Not all models are available in all regions. Check with your local country HP offices for availability.

NOTE: All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either P/N 666987-B21: HP SFF Hard Drive Blank Kit or P/N 666986-B21: HP LFF Hard Drive Blank Kit.

NOTE: All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (AOKO2A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the ProLiant Power Cables web page.

Caution: HP recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

| | Entry Models | Base Models | | | |
|----------------------|---|--|--|--|--|
| [SKU Number] | 777160-xx1 | 777161-xx1 | | | |
| Model Name | HP ProLiant ML110 Gen9 E5-2603v3 4GB-R B140i 4LFF NHP 350W PS Entry Server | HP ProLiant ML110 Gen9 E5-2620v3 8GB-R B140i 4LFF 350W PS Base Server | | | |
| Processor | Intel® Xeon® E5-2603v3 | Intel® Xeon® E5-2620v3 | | | |
| Number of Processors | | Dne | | | |
| Memory | 4GB (1x4GB Registered DIMMs, 2133 MHz) | 8GB (1x8GB Registered DIMMs, 1600 MHz) | | | |
| Network Controller | Broadcom 571 | Broadcom 5717 Dual-port 1GbE | | | |
| Storage Controller | HP Dynamic Smart Array B140i | | | | |
| Hard Drive | None ship standard | | | | |
| Internal Storage | 4 LFF HDD Bays (Non Hot Plug) | 4 LFF HDD Bays (Hot Plug) | | | |
| Optical Drive Bay | Optional Slim Optical Bay (SATA DVD-RW/ROM Optical Drive) | | | | |
| Optical Drive | Optional Slim Optical Bay (SA | TA DVD-RW/ROM Optical Drive) | | | |
| PCI-Express Slots | 5 PCIe 3.0 slot | s (without risers) | | | |
| Power Supply | (1) HP 350W A | (1) HP 350W ATX Power Supply | | | |
| Fans | 1 non hot plug | 1 non hot plug, non-redundant | | | |
| Management | iLO Management (standard), Intelligent Provisioning (standard), iLO Essentials (optional) | | | | |
| Form Factor | Tower (4.5U) | | | | |
| Warranty | - | Labor, 1-Year Onsite support with next business esponse. | | | |

Country Code Key

| xx1 = B21 | Worldwide |
|-----------|-----------|
| xx1 = 001 | US |
| xx1 = 031 | UK |
| xx1 = 291 | Japan |
| xx1 = 371 | AP |

Pre-configured Models

xx1 = 421EU xx1 = AA1PRC

NOTE: Not all models are available in all regions. Check with your local country HP offices for availability.



Configuration Information - Factory Integrated Models

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- 1. Factory Integrated Models must start with a CTO Server.
- 2. FIO indicates that this option is only available as a factory installable option.
- 3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
- 4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Step 1: Base Configuration (choose one of the following configurable models)

| [Chassis] | HP ProLiant ML110 Gen9 Non- | HP ProLiant ML110 Gen9 Hot | HP ProLiant ML110 Gen9 Hot | | |
|--------------------|---|------------------------------|------------------------------|--|--|
| | hot Plug 4LFF Configure-to- | Plug 4LFF Configure-to-order | Plug 8SFF Configure-to-order | | |
| | order Server | Server | Server | | |
| SKU Number | 776933-B21 | 776934-B21 | 776935-B21 | | |
| Processor | 1 | 1 | 1 | | |
| DIMM Slots | 8 DIMM slots for RDIMM, LRDIMM DDR4 Memory | | | | |
| Storage Controller | HP Dynamic Smart Array B140i | | | | |
| PCIe | | 5 PCIe 3.0 Slots | | | |
| Drive Cage | 4LFF Non Hot Plug | 4LFF Hot Plug | 8SFF Hot Plug | | |
| Network Controller | Broadcom 5717 Dual-port 1GbE | | | | |
| Fans | 1 non hot plug, non-redundant | | | | |
| Management | iLO Management (standard), Intelligent Provisioning (standard), iLO Essentials (optional) | | | | |
| USB | 2 front, 2 internal, 4 rear | | | | |

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

HP Processors

Select one or two processors from Core options-Processor section below.

- If one processor is desired, select one xxxxxx-L21
- If two processors are desired, select one xxxxxx-L21 and one xxxxxx-B21.
- Up to 2 processors supported. Mixing different processor models is not supported.
- DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

For the Intel® C600 Chipset E5-2600 Series, the letter preceding the model number indicates the Product Line (E3. E5. E7): 2600x v#. 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, x = L for low power SKUs and v# (not yet designated) = version number.

HP Memory

Select one or more memory from Core options-Memory section below.

- LRDIMM, RDIMM are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen9 servers support LRDIMM and RDIMM.
- HP memory from previous generation servers are not qualified or warranted with this HP ProLiant Server. HP SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9.
- If only one processor is installed, only half of the total DIMM slots are available. When populating with two processors all DIMM slots are available.
- Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: http://www.hp.com/go/proliant-energy-efficient.

Configuration Information - Factory Integrated Models

Depending on the memory configuration and processor model, the memory speed may run at 2133MHz, 1866MHz, 1600MHz or 1333MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: http://www.hp.com/go/ddr4config.

Power Supplies -100 series servers

Select one or more power supplies from Core Options-Power Supplies section below.

- Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HP Power Advisor tool to determine the right size power supply for your server configuration. The HP Power Advisor is located at: http://www.hp.com/go/hppoweradvisor.
- By RPS Enablement Kit power options, mixing of power supplies in the same RPS enablement kit is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.

Step 3: Choose Additional Factory Integratable Options

HP Networking

Select a standup NIC adapter from Core options-Networking section below.

- Please see the QuickSpecs for Technical Specifications and additional information: http://www.hp.com/go/ProLiantNICs.
- These options are upgradeable and can be changed from the original configuration after the server is shipped.
- For 10Gb adapters, a minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

HP Drives

Select one or more drives from Core options-HP Drives section below.

- The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.
- Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.
- The HP ProLiant Gen9 Smart Storage solutions are equipped with re-designed Small Form Factor (SFF 2.5 in) and Large Form Factor (LFF 3.5 in) hot plug carriers for HP Qualified Hard Drives and Solid State Drives. These new carriers provide status and activity indicators as well as caution indicators for "Do Not Remove".

HP Graphics Options

Select one or more graphics adapter from Additional options section below.

- Please see the HP Power Advisor for estimated power consumption of your individual system configuration prior to installing GPUs. The HP Power Advisor is located at: http://www.hp.com/go/hppoweradvisor.
- This section may contain FIO options, please see HP Computation & Graphics Accelerators section below.

HP Unique Options Select one or more Unique options from Core options section below.

- This section may contain FIO options, please see the Unique options section below.
- FIO indicates that this option is only available as a factory installable option.

HP Cooling Options Select one or more Fan Kits from Core options section below.

Configuration Information - Factory Integrated Models

- This section may contain FIO options, please see HP Cooling Options section below.
- FIO indicates that this option is only available as a factory installable option.

HP Storage Controllers

Select one or more Storage options from Additional options section below.

- The embedded B140i controller will operate in UEFI only mode. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22
- This section may contain FIO options, please see HP Storage Controllers section below.
- FIO indicates that this option is only available as a factory installable option.

SOQUETCK 5062-6971 (21) 4062-6971 (31) 4062-6971 (41) 4062-6971 (48) 4062-6971 (51) 4062-6971 (61) 4062-6971 (71) 4062-7479 HP ProLiant ML110 Generation (Gene)

Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the

| use of an HP approv | ed configurator. Contact your local sales representative for additional information. | |
|---------------------|--|------------|
| HP Unique Options | HP ML110 Gen9 Mini SAS H240 Cable Kit NOTE: Must be selected for H240 controller. 1 cable kit is required for Hot Plug 4LFF 2 cable kits are required for below: - Hot Plug 4+4 LFF (with additional drive cage) - 8SFF | 789648-B21 |
| | HP ML110 Gen9 Mini SAS P440/P840 Cable Kit NOTE: Must be selected for P440/P840 controller. 1 cable kit is required for P440x1 2 cable kits are required for P840x1 | 789651-B21 |
| | HP ML110 Gen9 System Fan Upgrade Kit NOTE: When any E5-1600 processor kit or SAS SSD is selected, then this option kit must be ordered. | 789654-B21 |
| | HP ML110 Gen9 PCI Fan and Baffle Kit NOTE: If any PCIe card is selected, then this option kit must be selected. This option kit cannot be selected if no PCIe card is ordered. | 784580-B21 |
| | HP ML110 Gen9 Redundant Power Supply Enablement Kit NOTE: If this kit must be selected when 750W CS Gold Ht Plg Pwr Supply Kit is ordered. | 784582-B21 |
| | HP AHCI-Enable FIO Setting NOTE: This needs to be selected when Advanced Host Controller Interface mode is required on B140i controller. | 801845-B21 |
| HP Processors | Entry Processors - E5-2600v3 series Processors | |
| 111100033013 | HP ML110 Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) FIO Processor Kit | 773167-L21 |
| | HP ML110 Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W) FIO Processor Kit | 773169-L21 |
| | Entry Processors - E5-1600v3 series Processors | |
| | HP ML110 Gen9 Intel® Xeon® E5-1603v3 (2.8GHz/4-core/10MB/140W) FIO Processor Kit | 783017-L21 |
| | HP ML110 Gen9 Intel® Xeon® E5-1620v3 (3.5GHz/4-core/10MB/140W) FIO Processor Kit | 783021-L21 |
| | HP ML110 Gen9 Intel® Xeon® E5-1650v3 (3.5GHz/6-core/15MB/140W) FIO Processor Kit | 783023-L21 |
| | Base Processors - E5-2600v3 series Processors | |
| | HP ML110 Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) FIO Processor Kit | 773158-L21 |
| | HP ML110 Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W) FIO Processor Kit | 773162-L21 |
| | HP ML110 Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) FIO Processor Kit | 773173-L21 |
| | HP ML110 Gen9 Intel® Xeon® E5-2623v3 (3GHz/4-core/10MB/105W) FIO Processor Kit | 780075-L21 |
| | Performance Processors - E5-2600v3 series Processors | |
| | HP ML110 Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) FIO Processor Kit | 773156-L21 |

HP Memory

Registered DIMMs (RDIMMs) for E5-2600v3 Series

QUITCKSpecs (21) 4062-6971 (31) 4062-6971 (41) 4062-6971 (48) 4062-6971 (51) 4062-6971 (61) 4062-6971 (71) 4062-7479

Core Options

| | HP 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 726717-B21 |
|-------------------|--|------------|
| | HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 726718-B21 |
| | HP 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 759934-B21 |
| | HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 726719-B21 |
| | HP 32GB (1x32GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit | 728629-B21 |
| | HP 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Registered Standard Memory Kit | 803026-B21 |
| | HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Standard Memory Kit | 803028-B21 |
| | Load Reduced DIMMs (LRDIMMs) for E5-2600v3 Series | |
| | HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit | 726720-B21 |
| HP Optical Drives | HP 9.5mm SATA DVD-ROM JackBlack Gen9 Optical Drive | 726536-B21 |
| | HP 9.5mm SATA DVD-RW JackBlack G9 Optical Drive | 726537-B21 |

HP Drives

NOTE: User may select any combination of SAS or SATA Hard Drives.

However, if RAID is selected and both SAS and SATA Hard Drives have been selected, then only the SAS Drives will be used in the RAID set.

NOTE: If B140i is the primary controller, user can only select SATA drives.

NOTE: SAS drives require the selection of a SAS controller. See card lists in Controllers section.

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

| HP 1.2TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 781518-B21 |
|--|------------|
| HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Dual Port Enterprise 3yr Warranty Hard Drive | 718162-B21 |
| HP 900GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 785069-B21 |
| HP 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652589-B21 |
| HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 759212-B21 |
| HP 600GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 781516-B21 |
| HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652583-B21 |
| HP 450GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 759210-B21 |
| HP 450GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652572-B21 |
| HP 300GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 759208-B21 |
| HP 300GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 785067-B21 |
| HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652564-B21 |
| HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive | 652605-B21 |
| SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives | |
| HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive | 652749-B21 |
| HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive | 652745-B21 |
| SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives | |
| HP 600GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive | 765424-B21 |
| HP 450GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive | 737394-B21 |
| HP 300GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive | 737261-B21 |

Core Options

| SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives | 765250 B24 |
|--|---------------|
| HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Driv | |
| HP 6TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 761477-B21 |
| HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Driv | |
| HP 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 695510-B21 |
| HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 652766-B21 |
| HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 652757-B21 |
| HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 652753-B21 |
| SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives | CEE710 D21 |
| HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive | 655710-B21 |
| HP 500GB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive | 655708-B21 |
| HP 2TB 6G SATA 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive | 765455-B21 |
| HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive | 765453-B21 |
| SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives | 765255 D21 |
| HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Driv | |
| HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 753874-B21 |
| HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Driv | |
| HP 4TB 6G SATA 7.2k rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 693687-B21 |
| HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 628061-B21 |
| HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 658079-B21 |
| HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 657750-B21 |
| HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive | 658071-B21 |
| SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives | 001000 D31 |
| HP 4TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive | |
| HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Har Drive | d 628065-B21 |
| HP 3TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive | 801886-B21 |
| HP 2TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive | 801884-B21 |
| HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Har Drive | d 659337-B21 |
| HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Har Drive | d 659339-B21 |
| HP 1TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive | 801882-B21 |
| HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive | 659341-B21 |
| 12G SAS Hot Plug SFF (2.5-inch) SC 512e Drives | |
| HP 2TB 12G SAS 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive | 765466-B21 |
| HP 1.8TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 512e 3yr Warranty Hard Drive | d 791034-B21 |
| HP 1TB 12G SAS 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive | 765464-B21 |
| HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC 512e Enterprise 3yr Warranty Har Drive | rd 748387-B21 |
| | |

6G SATA Hot Plug LFF (3.5-inch) Enterprise Light G1 Solid State Drives

SO QUETCK \$4062-6971 (21) 4062-6971 (31) 4062-6971 (41) 4062-6971 (48) 4062-6971 (51) 4062-6971 (61) 4062-6971 (71) 4062-7479 HP ProLiant ML110 Generation (Gen9)

| HP 960GB 6G SATA Light Endurance LFF 3.5-in SC Converter ENT Light 3yr Wty G1 Solid State Drive | 756604-B21 |
|--|------------|
| 6G SATA Hot Plug SFF (2.5-inch) SC Read Intensive Solid State Drives | |
| HP 1.6TB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804605-B21 |
| HP 960GB 6G SATA Read Intensive SFF 2.5-in SC 3yr Wty Solid State Drive | 789155-B21 |
| HP 800GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804599-B21 |
| HP 480GB 6G SATA Read Intensive SFF 2.5-in SC 3yr Wty Solid State Drive | 789145-B21 |
| HP 480GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804593-B21 |
| HP 240GB 6G SATA Read Intensive SFF 2.5-in SC 3yr Wty Solid State Drive | 789135-B21 |
| HP 240GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804587-B21 |
| HP 120GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804581-B21 |
| HP 80GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804575-B21 |
| 6G SATA Hot Plug RI-3 SFF (2.5-inch) SC Solid State Drives | |
| HP 3.84TB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816929-B21 |
| HP 1.92TB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816919-B21 |
| HP 960GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816909-B21 |
| HP 480GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816899-B21 |
| HP 240GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816889-B21 |
| HP 120GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816879-B21 |
| 6G SATA Hot Plug SFF (2.5-inch) SC Write Intensive Solid State Drives | |
| HP 1.2TB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804677-B21 |
| HP 800GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804671-B21 |
| HP 800GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804625-B21 |
| HP 400GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804665-B21 |
| HP 200GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804639-B21 |
| 6G SATA Hot Plug SFF (2.5-inch) SC Mixed Use Solid State Drives | |
| HP 1.6TB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804631-B21 |
| HP 480GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 832414-B21 |
| HP 200GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive | 804613-B21 |
| 6G SATA Hot Plug MU-3 SFF (2.5-inch) SC Solid State Drives | |
| HP 1.92TB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 817011-B21 |
| HP 960GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816995-B21 |
| HP 480GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816985-B21 |
| HP 240GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816975-B21 |
| HP 120GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive | 816965-B21 |
| 6G SATA Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives | |
| HP 800GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691868-B21 |
| HP 400GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691866-B21 |
| HP 200GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691864-B21 |
| HP 100GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691862-B21 |
| 6G SATA Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives | |
| HP 1.6TB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 757339-B21 |

SO QUETCK \$4062-6971 (21) 4062-6971 (31) 4062-6971 (41) 4062-6971 (48) 4062-6971 (51) 4062-6971 (61) 4062-6971 (71) 4062-7479 HP ProLiant ML110 Generation (Gen9)

| HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 717973-B21 |
|--|------------|
| HP 600GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 739898-B21 |
| HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 717971-B21 |
| HP 300GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 739888-B21 |
| HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive | 717969-B21 |
| 6G SATA Hot Plug SFF Value Endurance (2.5-inch) Enterprise Value G1 Solid State Dri | ves |
| HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty G1 Solid State Drive | 756657-B21 |
| HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty G1 Solid State Drive | 756636-B21 |
| HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty G1 Solid State Drive | 756621-B21 |
| 6G SATA Hot Plug SFF (2.5-inch) Enterprise Light G1 Solid State Drives | |
| HP 960GB 6G SATA Light Endurance SFF 2.5-in SC Enterprise Light 3yr Wty G1 Solid State Drive | 756601-B21 |
| 6G SATA Hot Plug SFF Value Endurance (2.5-inch) Enterprise Value M1 Solid State Dri | ives |
| HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive | 764929-B21 |
| HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive | 764927-B21 |
| HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive | 764925-B21 |
| HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive | 764923-B21 |
| 6G SATA Hot Plug SFF (2.5-inch) Enterprise Boot Solid State Drives | |
| HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Boot 3yr Wty Solid State Drive | 717965-B21 |
| HP 80GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Boot 3yr Wty Solid State Drive | 734360-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) Enterprise Mainstream Solid State Drives | |
| HP 800GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691860-B21 |
| HP 400GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691856-B21 |
| HP 200GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691854-B21 |
| HP 100GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive | 691852-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) SC Read Intensive Solid State Drives | |
| HP 1.6TB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804608-B21 |
| HP 960GB 6G SATA Read Intensive LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 789157-B21 |
| HP 800GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804602-B21 |
| HP 480GB 6G SATA Read Intensive LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 789147-B21 |

| HP 480GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804596-B21 |
|--|-------------------|
| HP 240GB 6G SATA Read Intensive LFF 3.5-in SC Converter 3yr Wty Solid State | 789137-B21 |
| Drive | |
| HP 240GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804590-B21 |
| HP 120GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804584-B21 |
| HP 80GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804578-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) RI-3 SCC SSD | |
| HP 3.84TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State | 816933-B21 |
| Drive | |
| HP 1.92TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State | 816923-B21 |
| Drive | |
| HP 960GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State | 816913-B21 |
| Drive | |
| HP 480GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State | 816903-B21 |
| Drive | |
| HP 240GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State | 816893-B21 |
| Drive | |
| HP 120GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State | 816883-B21 |
| Drive | |
| 6G SATA Hot Plug LFF (3.5-inch) SC Write Intensive Solid State Drives | _ |
| HP 1.2TB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804680-B21 |
| HP 800GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804674-B21 |
| HP 400GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804668-B21 |
| HP 200GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804642-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) SC Mixed Use Solid State Drives | |
| HP 1.6TB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804634-B21 |
| HP 800GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804628-B21 |
| HP 480GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 832417-B21 |
| HP 200GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive | 804616-B21 |
| 6G SATA Hot Plug LFF (3.5-inch) MU-3 SCC SSD | |
| HP 1.92TB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 817015-B21 |
| HP 960GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816999-B21 |
| HP 480GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816989-B21 |
| HP 240GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816979-B21 |
| HP 120GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive | 816969-B21 |
| 6G SATA Hot Plug LFF Value Endurance (3.5-inch) Converter Enterprise Value G1 So | |
| HP 1.6TB 6G SATA Value Endurance LFF 3.5-in SC Converter Enterprise Value 3yr | 757342-B21 |
| Wty Solid State Drive | 737342-021 |
| HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 | 756660-B21 |
| Solid State Drive | 750000 521 |
| HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 | 756639-B21 |
| Solid State Drive | |
| HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 | 756624-B21 |
| Solid State Drive | |
| 6G SATA Hot Plug LFF Value Endurance (3.5-inch) Converter Enterprise Value M1 Sc | olid State Drives |
| HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty | 764943-B21 |
| M1 Solid State Drive | |
| | |

SO QUETCK \$4062-6971 (21) 4062-6971 (31) 4062-6971 (41) 4062-6971 (48) 4062-6971 (51) 4062-6971 (61) 4062-6971 (71) 4062-7479 HP ProLiant ML110 Generation (Gen9)

| | HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764941-B21 |
|-------------------|--|------------|
| | HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive | 764939-B21 |
| | 6G SATA Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives | |
| | HP 800GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 718189-B21 |
| | HP 600GB 6G SATA Value Endurance LFF 3.5-in SC Conveter Enterprise Value 3yr Wty Solid State Drive | 739900-B21 |
| | HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 718183-B21 |
| | HP 300GB 6G SATA Value Endurance LFF 3.5-in SC Converter Enterprise Value 3yr Wty Solid State Drive | 739890-B21 |
| | HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive | 718177-B21 |
| | 6G SATA Hot Plug LFF (3.5-inch) Enterprise Boot Solid State Drives | |
| | HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Boot 3yr Wty Solid State Drive | 718171-B21 |
| | HP 80GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Boot 3yr Wty Solid State Drive | 734362-B21 |
| | Hard Drive Blank Kits | |
| | HP Large Form Factor Hard Drive Blank Kit | 666986-B21 |
| | HP Small Form Factor Hard Drive Blank Kit | 666987-B21 |
| | Hard Drive Kits | |
| | HP ML110 Gen9 4LFF Hot Plug Drive Cage Kit | 784584-B21 |
| | HP ML110 Gen9 8SFF Hot Plug Drive Cage Kit | 784586-B21 |
| HP Networking | 1 Gigabit Ethernet adapters | |
| | HP Ethernet 1Gb 4-port 331T Adapter | 647594-B21 |
| | HP Ethernet 1Gb 2-port 332T Adapter | 615732-B21 |
| | HP Ethernet 1Gb 2-port 361T Adapter | 652497-B21 |
| | HP Ethernet 1Gb 4-port 366T Adapter | 811546-B21 |
| | 10 Gigabit Ethernet adapters | |
| | HP Ethernet 10Gb 2-port 560SFP+ Adapter | 665249-B21 |
| | HP Ethernet 10Gb 2-port 561T Adapter | 716591-B21 |
| | HP Ethernet 10Gb 2-port 546SFP+ Adapter | 779793-B21 |
| HP Power Supplies | HP Entry-Level Power Supplies | |
| | HP 750W Common Slot Gold Hot Plug Power Supply Kit | 512327-B21 |
| | HP ML110 Gen9 350W ATX Gen9 Power Supply FIO Kit | 776442-B21 |
| | HP 550W ATX Gen9 Power Supply Kit | 776444-B21 |
| | HP ML110 Gen9 Redundant Power Supply Enablement Kit NOTE: If this kit must be selected when 750W CS Gold Ht Plg Pwr Supply Kit is ordered. | 784582-B21 |
| | NOTE: Check power advisor for power consumption for the customer usage case. Power specifications and technical content for all HP Server power supplies can be found at http://www.hp.com/go/proliant/powersupply. | |
| | | |

QUICKSpecs (21) 4062-6971 (31) 4062-6971 (41) 4062-6971 (48) 4062-6971 (51) 4062-6971 (61) 4062-6971 (71) 4062-7479

Core Options

HP Computation and Graphics **Accelerators**

HP NVIDIA Quadro K2200 Graphics Accelerator JOG89A HP NVIDIA Quadro K4200 Graphics Accelerator JOG90A

NOTE: If this SKU is selected, then customer must select HP 750W CS Gold Ht Plg

Pwr Supply Kit OR HP 550W ATX-GEN9 Pwr Supply Kit in order.

NOTE: Tthis option kit cannot be selected with 350W power supplies due to power

consumption.

NOTE: HP ML110 Gen9 GPU Supporting Holder Kit must be selected.

HP ML110 Gen9 GPU Supporting Holder Kit

787006-B21

NOTE: Only the above listed Graphics cards are HP standard supported options in this server. NOTE: The NVIDIA Quadro modules are supported only on 64-bit versions of Linux and Windows operating systems as well as on Virtual Machine client operating systems. The supported bare metal operating systems are RHEL6, SLES 11 and Windows Server 2012 R2.

NOTE: Please see the HP Power Advisor for estimated power consumption of your individual system configuration prior to installing GPUs. The HP Power Advisor is located at:

http://www.hp.com/go/hppoweradvisor.

HP Cooling Options HP ML110 Gen9 PCI Fan and Baffle Kit

784580-B21

NOTE: If any PCIe card is selected, then this option kit must be selected. This option kit cannot be selected if no PCIe card is ordered.

HP ML110 Gen9 System Fan Upgrade Kit

789654-B21

NOTE: When any 140W processor kit or SAS SSD is selected, then this option kit must be ordered.



QUICKSpecs (21) 4062-6971 (31) 4062-6971 (41) 4062-6971 (48) 4062-6971 (51) 4062-6971 (61) 4062-6971 (71) 4062-7479

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

| HP | Insight |
|-----|---------|
| Snf | tware |

HP Insight Control

HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single C6N36A

Server FIO License

HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic C6N28ABE

License

BD883A HP Insight Control Server Provisioning Media Kit

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24x7 HP Software Technical Support and Update Service.

NOTE: Licenses ship without media. The HP Insight Control Media Kit can be ordered separately, or can be downloaded at: http://www.hp.com/go/insightupdates.

NOTE: For additional license options please see the OuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12631_div/12631_div.html.

Embedded Management

HP iLO Advanced

| HP iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU | E6U64ABE |
|--|------------|
| HP iLO Advanced 1 Server License with 3yr 24x7 Tech Support and Updates | BD505A |
| HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License | 512485-B21 |
| HP iLO Advanced including 1yr 24x7 Technical Support and Updates Flexible Quantity License | 512486-B21 |
| HP iLO Advanced including 1yr 24x7 Technical Support and Updates Tracking License | 512487-B21 |
| HP iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU | E6U59ABE |
| HP Integrated Lights-Out Essentials including 3yr 24x7 Technical Support and Updates E-LTU | E6U61ABE |
| HP Integrated Lights-Out Essentials including 1yr 24x7 Technical Support and Updates E-LTU | E6U62ABE |
| HP Integrated Lights-Out Essentials including 3yr 24x7 Tech Support and Updates | BD774A |
| Single Svr License | |
| HP Integrated Lights-Out Essentials including 1yr 24x7 Tech Support and Updates Single Svr License | BD775A |

HP Security

HP Trusted Platform Module Option

NOTE: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline. For more information about TPM. including a white paper, go to: http://www.hp.com/go/TPM.

NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment.

NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.

c04545452 — DA — 15204 Worldwide — Version 5 — September 28, 2015

488069-B21

Additional Options

HP Storage Controllers

| CAC Controller | |
|---|------------|
| SAS Controller HP Smart Array P440/2GB FBWC 12Gb 1-port Int SAS Controller | 820834-B21 |
| HP Smart Array P440/4GB FBWC 12Gb 1-port Int SAS Controller | 726821-B21 |
| HP Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller | 726825-B21 |
| HP Smart Array P840/4GB FBWC 12Gb 2-ports Int SAS Controller | 726897-B21 |
| NOTE: When additional 8SFF Drive cage is ordered and also P840 is selected, then | /2089/-621 |
| Must select one separate HP ML110 Gen9 Mini SAS P440/P840 Cbl Kit. | |
| HP Smart Array P440/4GB FBWC 12Gb 1-port Int FIO SAS Controller | 761872-B21 |
| NOTE: Smart Storage Battery included. | /010/2-DZ1 |
| NOTE: Must select battery holder P/N: 786710-B21 when purchase P440. | |
| NOTE: B140i can't mix with any standup internal controller. | |
| HP Smart Array P840/4GB FBWC 12Gb 2-ports Int FIO SAS Controller | 761874-B21 |
| NOTE: Smart Storage Battery included. | 701074-021 |
| NOTE: B140i can't mix with any standup internal controller. | |
| NOTE: Must select P840/4G Controller when apply 16SFF. | |
| NOTE: Must select P440/P840 Cable kit, 1 cable kit per controller. | _ |
| NOTE: Must select P840/4G FIO Controller when additional drive cage is selected. | |
| HP Smart Array P841/4GB FBWC 12Gb 4-ports Ext SAS Controller | 726903-B21 |
| HP ML110 Gen9 Mini SAS H240 Cable Kit | 789648-B21 |
| NOTE: Must be selected for H240 controller. | 703040 B21 |
| 1 cable kit is required for Hot Plug 4LFF | |
| 2 cable kits are required for below: | |
| - Hot Plug 4+4 LFF (with additional drive cage) | |
| - 8SFF | |
| HP ML110 Gen9 Mini SAS P440/P840 Cable Kit | 789651-B21 |
| NOTE: Must be selected for P440/P840 controller. | |
| 1 cable kit is required for P440x1 | |
| 2 cable kits are required for P840x1 | |
| NOTE: Must select battery holder kit when P series FIO controller is selected. | |
| SAS Controller Options | |
| HP 96W Smart Storage Battery with 145mm Cable for DL/ML/SL Servers | 727258-B21 |
| HP Host Bus Adapter | |
| HP H240 12Gb 2-ports Int Smart Host Bus Adapter | 726907-B21 |
| HP H241 12Gb 2-ports Ext Smart Host Bus Adapter | 726911-B21 |
| HP H240 12Gb 2-ports Int FIO Smart Host Bus Adapter | 761873-B21 |
| NOTE: Must select for H240 controller. | |
| 1 cable kit is required for Hot Plug 4LFF. | |
| 2 cable kits are required for below: | |
| - Hot Plug 4+4 LFF (with additional drive cage) | |
| - 8SFF | |
| Battery Holder | |
| HP ML150 Gen9 Smart Storage Battery Holder Kit | 786710-B21 |
| NOTE: Only support P series controllers. | |
| Optional Software | |
| HP Secure Encryption No Media Flexible License per Drive | D8S84A |
| HP Secure Encryption No Media E-LTU per Drive | D8S85AAE |
| NOTE: HP Secure Encryption is supported when one of the supported Smart Array | |
| Controllers or the supported Smart SAS HBA (configured in a RAID mode) is | |
| installed in the server. | |
| HP Secure Encryption licensing is based on the number of physical drives | |
| requiring encryption. NOTE: For more information about HP Secure Encryption, go to | |
| MOTE. FOR MORE IMPORTACION ADDUCTOR DECURE ENCRYPTION, 90 to | |

QUICKSpecs (21) 4062-6971 (31) 4062-6971 (41) 4062-6971 (48) 4062-6971 (51) 4062-6971 (61) 4062-6971 (71) 4062-7479

Additional Options

http://www.hp.com/go/hpsecureencryption.

HP SmartCache No Media 24x7 Technical Support 1 Svr License D7S26A HP SmartCache No Media 24x7 Technical Support Flexible License D7S27A HP SmartCache No Media 24x7 Technical Support Electronic License D7S27AAE

NOTE: HP SmartCache is supported when one of the supported Smart Array

Controllers is installed in the server.

NOTE: HP SmartCache comes standard (no licensing is required) if the HP Smart

Array P840 Controller is installed in the server.

HP Tape Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media see:

http://www.hp.com/go/tape. For hardware and software compatibility of HP tape backup products see:

http://www.hp.com/storage/SPOCK and http://www.hp.com/go/ebs. **NOTE:** Must select SAS controller to support internal SAS tape drives.

NOTE: Tape drive and HDD total amount can't exceed SAS controller support qty.

NOTE: Limited to H240 when select Tape Drive.

Tape Drives

| HP StoreEver 1/8 G2 LTO-6 Ultrium 6250 FC Tape Autoloader | COH19A |
|---|--------|
| HP StoreEver LTO-6 Ultrium 6250 Tape Drive in 1U Rack-mount Kit | COL99A |
| HP StoreEver LTO-4 Ultrium 1760 SAS (1) in 1U Rack-mount Kit | EH946C |
| HP StoreEver LTO-5 Ultrium 3000 SAS Tape Drive in 1U Rack-mount | EJ014B |
| HP StoreEver LTO-5 Ultrium 3280 SAS Tape Drive in 3U Rack-mount | EJ013B |
| HP StoreEver 1U SAS Rack-mount Kit | AE459B |
| HP StoreEver LTO-3 Ultrium 920 SAS External Tape Drive | EH848B |
| HP StoreEver LTO-5 Ultrium 3280 SAS External Tape Drive | EH900B |
| HP StoreEver LTO-4 Ultrium 1760 SAS External Tape Drive | EH920B |
| HP StoreEver LTO-5 Ultrium 3000 SAS External Tape Drive | EH958B |
| HP StoreEver LTO-6 Ultrium 6650 SAS External Tape Drive | EH964A |
| HP StoreEver LTO-6 Ultrium 6250 External Tape Drive | EH970A |
| HP Mini SAS High Density to 4-lane Mini SAS External Fanout 2 Meter Cable | K2R09A |
| HP Mini SAS High Density to 4-lane Mini SAS External Fanout 4 Meter Cable | K2R10A |
| HP Tape Storage Systems HP StoreEver MSL6480 | |
| HP StoreEver MSL6480 Scaleable Expansion Module | 0U626A |

| HP StoreEver MSL6480 Scaleable Expansion Module | QU626A |
|---|--------|
| HP StoreEver MSL6480 Scalable Base Module | QU625A |
| HP MSL2024 0-Drive Tape Library | AK379A |
| HP MSL4048 0-Drive Tape Library | AK381A |

HP Disk Backup

HP RDX Removable Disk Backup System

| HP RDX320 USB3.0 External Disk Backup System | B7B63A |
|--|--------|
| HP D3700 Enclosure | QW967A |
| HP D3600 Enclosure | QW968A |

HP Disk Storage Systems

Disk Enclosures

| HP D6000 w/35 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 140TB Bundle | E7W30A |
|--|--------|
| HP D6000 w/70 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 280TB Bundle | E7W31A |
| HP D6000 Dual I/O Module Disk Enclosure | QQ695A |
| HP D6000 w/35 2TB 6G SAS 7.2K LFF Dual port MDL HDD 70TB Bundle | QQ697A |
| HP D6000 w/70 2TB 6G SAS 7.2K LFF Dual port MDL HDD 140TB Bundle | QQ698A |
| HP D6000 w/35 3TB 6G SAS 7.2K LFF Dual port MDL HDD 105TB Bundle | QQ699A |
| HP D6000 w/70 3TB 6G SAS 7.2K LFF Dual port MDL HDD 210TB Bundle | QQ700A |
| HP D2600 w/12 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 48TB Bundle | E7W32A |

SOQUETCK 5062-6971 (21) 4062-6971 (31) 4062-6971 (41) 4062-6971 (48) 4062-6971 (51) 4062-6971 (61) 4062-6971 (71) 4062-7479 HP ProLiant ML110 Generation (Gene)

Additional Options

HP Rack Mount Consoles, KVM Switches, and Keyboards

| HP D6000 w/70 8TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 560TB Bundle HP D6000 w/70 6TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 420TB Bundle | MOT59A MOT57A |
|--|--------------------------|
| HP D6000 w/35 8TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 280TB Bundle | MOT58A |
| | |
| HP Location Discovery Services | |
| HP Location Discovery Services LCD8500 Kit | TL052A |
| NOTE: Please see the HP Location Discovery Services QuickSpecs for information | |
| on additional options and product specifications. | |
| HP Rack Mount Consoles | 455304 |
| HP LCD8500 1U US Rackmount Console Kit | AF630A |
| HP LCD8500 1U UK Rackmount Console Kit | AF631A |
| HP LCD8500 1U DE Rackmount Console Kit | AF632A |
| HP LCD8500 1U FR Rackmount Console Kit | AF633A |
| HP LCD8500 1U JP Rackmount Console Kit | AF642A |
| HP LCD8500 1U RU Rackmount Console Kit | AF643A |
| HP LCD8500 1U INTL Rackmount Console Kit | AF644A |
| HP LCD8500 1U US TAA Rackmount Console Kit | AF645A |
| HP KVM Switches | AF650A |
| HP USB Remote Access Key for G3 KVM Console Switches HP 0x1x8 G3 KVM Console Switch | |
| HP 0x2x16 G3 KVM Console Switch | AF651A |
| | AF652A |
| HP TAA 0x2x16 G3 KVM Console Switch HP KVM Console USB Interface Adapter | AF653A AF628A |
| HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software | AF628A AF618A |
| HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software | |
| | AF619A AF629A |
| HP KVM Console USB 2.0 Virtual Media CAC Interface Adapter HP 1x4 USB/PS2 KVM Console Switch | |
| HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software | AF611A |
| HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software | AF620A |
| HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software | AF621A AF622A |
| | AFOZZA |
| HP USB Keyboard and Mouse HP USB BFR with PVC Free US Keyboard/Mouse Kit | 631341-B21 |
| HP USB BFR with PVC Free Intl Keyboard/Mouse Kit | 672097-B33 |
| HP USB BFR with PVC Free UK Keyboard/Mouse Kit | |
| HP USB BFR with PVC Free FR Keyboard/Mouse Kit | 631344-B21 631346-B21 |
| HP USB BFR with PVC Free ES Keyboard/Mouse Kit | 631348-B21 |
| HP USB BFR with PVC Free DE Keyboard/Mouse Kit | 631358-B21 |
| HP USB BFR with PVC Free JP Keyboard/Mouse Kit | 631360-B21 |
| HP USB BFR with PVC Free IT Keyboard/Mouse Kit | 631362-B21 |
| HP USB BFR with PVC Free CN Keyboard/Mouse Kit | 631364-B21 |
| HP USB BFR with PVC Free AE Keyboard/Mouse Kit | 638212-B21 |
| HP USB BFR with PVC Free RU Keyboard/Mouse Kit | 638214-B21 |
| • | |
| HP USB BFR with PVC Free SE Keyboard/Mouse Kit | 672097-103 |
| HP USB BFR with PVC Free CH Keyboard/Mouse Kit HP USB BFR with PVC Free PT Keyboard/Mouse Kit | 672097-113 672097-133 |
| | 672097-133 |
| HP USB BFR with PVC Free TR Keyboard/Mouse Kit | |
| HP USB BFR with PVC Free CZ Keyboard/Mouse Kit | 672097-223 672097-353 |
| HP USB BFR with PVC Free FI Keyboard/Mouse Kit | 672097-353 672097-373 |
| HP USB BFR with PVC Free AP-Intl Keyboard/Mouse Kit | 672097-373 672097-D63 |
| HP USB BFR with PVC Free IN Keyboard/Mouse Kit | 0/203/-003 |

SOQUETCK 5062-6971 (21) 4062-6971 (31) 4062-6971 (41) 4062-6971 (48) 4062-6971 (51) 4062-6971 (61) 4062-6971 (71) 4062-7479 HP ProLiant ML110 Generation (Gene)

Additional Options

HP Uninterruptible Power Systems

(UPS)

| HP USB BFR with PVC Free KR Keyboard/Mouse Kit | 672097-KD3 |
|---|------------|
| HP 1U INT Rackmount Keyboard with USB | AG086A |
| HP 1U US Rackmount Keyboard with USB | AG072A |
| NOTE: Please see the HP USB Keyboard and Mouse QuickSpecs for information on | 71007271 |
| additional options and product specifications. | |
| HP Other Options | |
| HP Rack LED Light Kit | BW939A |
| HP Kit LCD 1.83m Latch Display Port Cable | G7T29A |
| HP Advanced Power Manager Kit | 741192-B21 |
| HP DirectFlow Three Phase UPS | |
| Power Unit (1U UPS) | |
| HP R12000 DirectFlow - 1U Rackmount Uninterruptible Power System | G9Y75A |
| HP R12000 DirectFlow - POD 1U Rackmount Uninterruptible Power System | AF478A |
| Input/Output Module Options for 1U UPS | |
| HP 32A 400-415 Volt Three Phase INTL R12000 DirectFlow UPS IEC309 | AF488A |
| Input/Output Module | |
| HP 30A 400-415 Volt Three Phase NA R10000 DirectFlow UPS IEC309 Input/Output Module | AF489A |
| HP 32A 380 Volt Three Phase China R12000 DirectFlow UPS Unterminated Input/Output Module | AF490A |
| HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS L22-30 Input/Output | AF491A |
| Module | 454024 |
| HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module | AF492A |
| HP 30A 400-415 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module | G9Y76A |
| Power Unit (2U UPS) | |
| HP R18000 DirectFlow - 2U Rackmount Uninterruptible Power System | AF479A |
| Input/Output Module Options for 2U UPS | |
| HP 32A 400-415 Volt Three Phase INTL R18000 DirectFlow UPS IEC309 Input/Output Module | AF483A |
| HP 30A 380 Volt Three Phase China R18000 DirectFlow UPS Unterminated | AF485A |
| Input/Output Module HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output | AF486A |
| Module | |
| HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module | AF487A |
| HP 30A 400 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module | D9Q02A |
| HP 30A 400-415V Three Phase NA R18000 DirectFlow UPS 1:1 IEC309 | AF484A |
| Input/Output Module | |
| NOTE: All Input/Output Modules support dual output outlets except the AF484A. | |
| Battery Pack Options | |
| HP DirectFlow UPS - 1U Rackmount Lithium-ion Battery Pack | AF480A |
| HP DirectFlow UPS - 3U Rackmount VRLA Battery Pack | AF482A |
| HP WW DirectFlow Secondary Battery Cable | AF497A |
| NOTE: Please see the HP DirectFlow Three Phase Uninterruptible Power System QuickSpecs for information on additional options and product specifications. | |
| HP Tower UPS | |
| HP T750 G4 UPS Models | |

HP T750 G4 NA/JP Uninterruptible Power System

J2P85A

SO QUETCK \$4062-6971 (21) 4062-6971 (31) 4062-6971 (41) 4062-6971 (48) 4062-6971 (51) 4062-6971 (61) 4062-6971 (71) 4062-7479 HP ProLiant ML110 Generation9 (Gen9)

Additional Options

HP USB and SD Options

HP Care Pack Services

| HP T750 G4 INTL Uninterruptible Power System | J2P88A |
|---|------------------|
| HP T1000 G4 UPS Models | |
| HP T1000 G4 NA/JP Uninterruptible Power System | J2P86A |
| HP T1000 G4 INTL Uninterruptible Power System | J2P89A |
| HP T1500 G4 UPS Models | |
| HP T1500 G4 NA/JP Uninterruptible Power System | J2P87A |
| HP T1500 G4 INTL Uninterruptible Power System | J2P90A |
| HP Rack/Tower UPS | |
| HP R/T2200 G4 UPS Models | |
| HP R/T2200 G4 NA/JP Uninterruptible Power System | J2R00A |
| HP R/T3000 G4 UPS Models | |
| HP R/T3000 G4 Low Voltage NA/JP Uninterruptible Power System | J2R01A |
| HP R/T3000 G4 High Voltage NA/JP Uninterruptible Power System | J2R02A |
| HP R/T3000 G4 High Voltage INTL Uninterruptible Power System | J2R04A |
| R1500 G4 Models | |
| HP R1500 G4 NA Uninterruptible Power System | J2Q99A |
| HP R1500 G4 JP/TWN Uninterruptible Power System | J2R05A |
| HP R1500 G4 INTL Uninterruptible Power System | J2R03A |
| R7000 Uninterruptible Power System (UPS) | 32NO3N |
| HP R7000 4U 50A High Voltage NA/JP Uninterruptible Power System | AF462A |
| HP R7000 40 30A High Voltage INTL Uninterruptible Power System | AF463A |
| | AF403A |
| R5000 Uninterruptible Power System (UPS) | AF460A |
| HP R5000 3U L630 High Voltage NA/JP Uninterruptible Power System | |
| HP R5000 3U IEC309-32A High Voltage INTL Uninterruptible Power System | AF461A |
| HP UPS Options | 120004 |
| HP R/T2200 G4 Extended Runtime Module | J2R09A |
| HP R/T3000 G4 Extended Runtime Module | J2R10A |
| HP 2U Rack/Tower UPS Shipping Kit | L4Q11A |
| NOTE: Please see the HP Line Interactive Single Phase UPS QuickSpecs for | |
| information on additional options and product specifications. NOTE: To learn more, please visit the HP Uninterruptible Power Systems (UPS) | |
| web page. | |
| web page. | |
| HP Enterprise Mainstream Flash Media Kits for Memory Cards | |
| HP 8GB microSD Enterprise Mainstream Flash Media Kit | 726116-B21 |
| HP 32GB microSD Enterprise Mainstream Flash Media Kit | 700139-B21 |
| | |
| HP 8GB USB Enterprise Mainstream Flash Media Drive Key Kit | 737953-B21 |
| HP Dual 8GB microSD Enterprise Midline USB Kit | 741279-B21 |
| Foundation Care | |
| HP 3 year 24x7 ML110 Gen9 Foundation Care Service | U8JB1E |
| HP 3 year 24x7 with Defective Media Retention ML110 Gen9 Foundation Care | U8JB2E |
| Service | OOJDZE |
| HP 3 year 24x7 w/Comprehensive Defective Material Retention ML110 Gen9 | U8JG2E |
| · · · · · · · · · · · · · · · · · · · | 33322 |
| Foundation Care Service | |
| Foundation Care Service Proactive Care | |
| Proactive Care | IR IR3F |
| | U8JB3E U8JB4E |

Additional Options

HP 3 year 24x7 w/Comprehensive Defective Material Retention ML110 Gen9 **Proactive Care Service**


U8JG3E




Architecture

Memory Subsystem Each Intel® Xeon® E5-2600v3 family processor socket contains four memory channels per installed processor with one DIMM per channel for a total of four (4) DIMMs or a grand total of eight (8) DIMMs for the server.

Memory Population guidelines

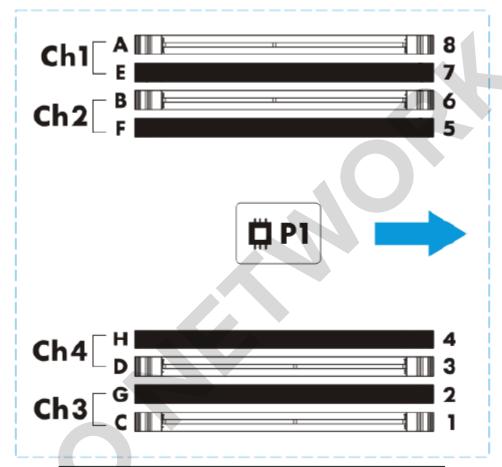

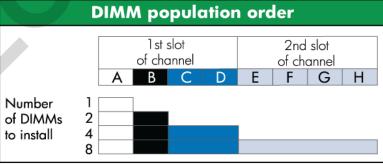

General Memory Population Rules and Guidelines:

- . Install DIMMs only if the corresponding processor is installed.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors and load the channels similarly whenever possible.
- White DIMM slots denote the first slot to be populated in a channel.
- Place the DIMMs with the highest number of ranks in the white slot when mixing DIMMs of different ranks on the same channel.
- Do not mix RDIMMs or LRDIMMs.

- Quad rank RDIMMs are not supported in HP ProLiant ML110 Gen9 servers.
- Quad rank LRDIMMs are capable of up to three DIMMs per channel.
- RDIMMs operating at 1.2V.
- DIMMs of different speeds may be mixed in any order; the server will select a common optimal speed.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the memory type and number of installed processors.
- To realize the performance memory capabilities listed in this document, HP SmartMemory is required.
- There are four (4) channels per processor There are two (2) DIMM slots for each memory channel; eight (8) total slots. Memory channels 1 and 3 consists of the two (2) DIMMs that are furthest from the processor. Memory channel 2 and 4 consists of the two (2) DIMMs that are closest to the processor.

Intel Gen9 Supported Memory Bandwidth for HP ProLiant Gen9 Intel® Xeon®E5-2600v3 Series Processor Family

Memory Bandwidth and Capacity

| [DIMM Type] | | | | | | Load Reduced (LRDIMMs) | |
|-----------------------------|-----------------------|---------|-------------|------|------|------------------------------|--|
| DIMM Rank | Single Rank Dual Rank | | | | | | |
| DIMM Capacity | 4GB | 4GB 8GE | | 16GB | 32GB | 16GB | |
| DIMM Native Speed (MT/s) | 2133 | | | | | | |
| Voltage | | Sto | l Voltage 1 | .2V | | | |
| SLOTS THAT CAN BE POPULATED | SLOTS THAT CAN BE | | | | | | |
| 8 slot servers | 8 | 8 | 8 | 8 | 8 | 8 | |
| MAXIMUM CAPACITY (GB) | | | | | | | |
| | 32 | 6 | 4 | 128 | 256 | 128 | |
| | | | | | | | |
| 1 DIMM Per Channel | 2133 | | | | | | |
| 2 DIMM Per Channel | 2133 | | | | | 2133 | |
| 3 DIMM Per Channel | 1600 1600 | | | | | | |

DIMM slot and configuration diagram

DIMM slot and configuration diagrams

- Population order; start with "A" first, "B" second, "C" third, etc.
- When one processor is installed, install DIMMs in sequential alphabetic order: A, B, C, D, E, F ...
- alphabetic order: CPU1-A, CPU2-A, CPU1-B, CPU2-B, CPU1-C, CP2-C

| | 51 | CPU 1 | | CPU 2 | |
|------------------|-----------|-------------------------------|--------|-----------------------------|--------|
| | Slot # | population order | Slot # | Slot # population order | |
| Chnl 3 | 1 | С | 1 | С | Chnl 1 |
| | 2 | G | 2 | G | |
| | | CPU 1 | | CPU 2 | 4 |
| | Slot # | population order | Slot # | population order | |
| Chnl 4 | 3 | D | 3 | В | Chnl 2 |
| | 4 | Н | 4 | F | |
| | <u>-</u> | - | • | | |
| | | CPU 1 | | CPU 2 | |
| | Slot # | CPU 1 population order | Slot # | CPU 2 | |
| Chnl 2 | Slot # | Ī | | | Chnl 4 |
| Chnl 2 | 5 | Ī | | population order | Chnl 4 |
| Chnl 2 | 5 | population order F | 5 | population order | Chnl 4 |
| Chnl 2 | 5 | population order F B | 5 6 | population order H D | Chnl 4 |
| Chnl 2 Chnl 1 | 5 | population order F B CPU 1 | 5 6 | population order H D CPU 2 | Chnl 4 |

Memory Speed by Processor Model

| Processor Models | Supported Memory Speeds |
|---|-------------------------|
| E5-2609v3, E5-2603v3, | 1600MHz |
| E5-1603v3, E5-2640v3, E5-2620v3, E5-2630Lv3, E5-2623v3, | 1866MHz |
| E5-1620v3, E5-1650v3, E5-2660v3, | 2133MHz |


Standard and **Maximum Memory** Capacity (Preconfigured Models)

| Pre-Configured Models | - | Optional Memory | Standard Memory Replaced with Optional Memory |
|-----------------------|-------------|-----------------------|---|
| E5-2603v3, | 4GB (1x4GB) | 228GB (7x32GB, 1x4GB) | 128GB (8x16GB) |
| E5-2620v3, | 8GB (1x8GB) | 232GB (7x32GB, 1x8GB) | 128GB (8x16GB) |

DDR4 memory options part number decoder

NOTE: Capacity references are rounded to the common gigabyte (GB) values.


- 4GB = 4,096MB
- 8GB = 8,192MB
- 16GB = 16,384MB
- 32GB = 32,768MB

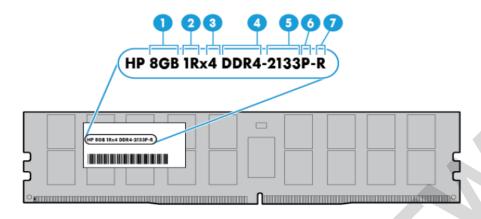

- 1. Capacity: 4GB/8GB/16GB/32GB
- 2. Rank: 1R = Single-rank; 2R = Dual-rank; 4R = Quad-rank
- 3. Data width: x4 = 4-bit; x8 = 8-bit
- 4. Memory generation: DDR4
- 5. Maximum memory speed: 2133 MT/s
- 6. CAS latency: P = 15
- 7. DIMM type: R = RDIMM (registered); L = LRDIMM (load reduced)


Storage

4-bay LFF non-hot-plug drive model

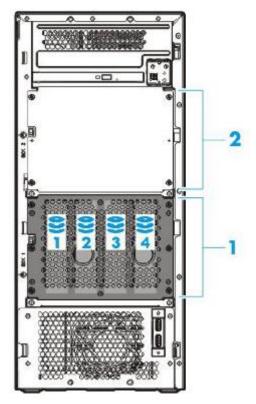

4 x LFF SATA/SSD Non-hot-plug Hard Drive Bays


4-bay LFF hot-plug drive model

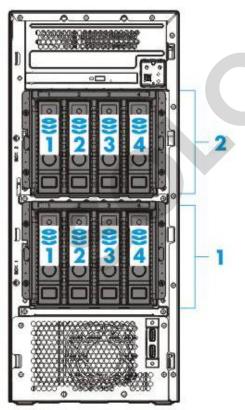

4 x LFF SAS/SSD Hot Pluggable Hard Drive Bays 1-4

Storage

8-bay SFF hot-plug drive model

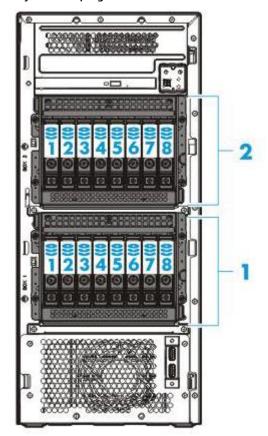

- 1 x 1-8 8 x SFF SATA/SSD Hot Pluggable Hard Drive Bays
- 1 x 2-8 8 x SFF SATA/SSD Hot Pluggable Hard Drive Bays

Maximum Storage Capacity -

Total (8 LFF Drive) **48TB** Total (16 SFF Drive) 25.6TB

Technical Specifications

System Unit

Tower **Dimensions** 17.32(H) x 7.68(W) x 18.92(D) in (44 x 19.5 x 48.05 cm)

Tower Weight

Minimum: 27.56lb (12.5kg)

Maximum: 55lb (24.9q)

Input Requirements

Range Line 100 to 240 VAC Voltage For 350W & 550W Power Supply:8A (at 100~240 VAC)

Rated Input Current

Rated Input

50 to 60 Hz

Frequency

Rated Input Power For 550 W Power Supply: < 639 W (at 100 VAC), < 605 W (at 200

VAC)

For 350 W Power Supply: < 427 W (at 100 VAC), < 427 W (at 200

VAC)

BTU Rating Maximum For 550 W Power Supply:2204 BTU/hr (at 100 VAC),2113

BTU/hr (at 200 VAC)

For 350 W Power Supply:1452 BTU/hr (at 100 VAC),1544

BTU/hr (at 200 VAC)

Power Specifications To review typical system power ratings use the Power Advisor which is available via the online tool located at URL: http://www.hp.com/go/proliant-energy-efficient or

http://www.hp.com/go/hppoweradvisor - Click on the system of interest.

Power Supply Output

Rated Steady-State Power

For 550 W Power Supply:550 W (at 100 VAC),550 W (at 200

VAC),

Maximum Peak Power

For 350 W Power Supply:350 W (at 100 VAC),350 W (at 200

VAC),

System Inlet Temperature Standard

10° to 35°C (50° to 95°F) at sea level with an altitude derating of Operating Support 1.0°Cper every 304.8 m (1.8°F per every 1000 ft) above sea level to a maximum of 3048 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C(86°F).

Extended Ambient For approved hardware configurations, the supported system Operating Support inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3048m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hp.com/servers/ashrae.

> For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3048 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:

http://www.hp.com/servers/ashrae.

System performance may be reduced if operating in the extended ambient operating range or with a fan fault. **NOTE:** Supports A3 extended ambient.

Technical Specifications

-30° to 60°C (-22° to 140°F). Maximum rate of change is Non-operating

20°C/hr(36°F/hr).

Relative **Humidity** Operating Minimum to be the higher (more moisture) of -12°C (10.4°F)

dew point or 8% relative humidity. Maximum to be the lower (less moisture) of24°C (75.2°F) dew point or 90% relative

humidity.

5% to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum Non-operating

wet bulb temperature, non-condensing.

Altitude Operating 3048 m (10,000 ft). This value may be limited by the type and

number of options installed. Maximum allowable altitude

change rate is 457m/min (1500 ft/min).

Non-operating 9144 m (30,000 ft). Maximum allowable altitude change rate is

457m/min (1500 ft/min).

Acoustic Noise Listed are the declared A-Weighted sound power levels (LWAd) and declared

average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with

ISO 9296 (ECMA 109).

Idle

L WAd 3.6 Bels (LFF Non Hot-Plug Base)

3.6 Bels (LFF Hot-plug Base)

4.1 Bels (LFF Hot-plug Performance) 21 dBA (LFF Non Hot-Plug Base)

L pAm 21 dBA (LFF Hot-plug Base)

27 dBA (LFF Hot-plug Performance)

Operating

L WAd 3.6 Bels (LFF Non Hot-Plug Base)

3.7 Bels (LFF Hot-plug Base)

4.2 Bels (LFF Hot-plug Performance)

L pAm 21 dBA (LFF Non Hot-Plug Base)

21 dBA (LFF Hot-plug Base)

25 dBA (LFF Hot-plug Performance)

NOTE: Configurations tested for LFF non hot-plug based models included one (1)

1TB LFF SATA Midline HDD and Windows 2012 Enterprise 64-bit.

NOTE: Configurations tested for LFF hot-plug base models included one (1) 1TB LFF

SATA Midline HDD and Windows 2012 Enterprise 64-bit.

NOTE: Configurations tested for LFF hot-plug performance models included four

(4) 2TB LFF SATA Midline HDD and Windows 2012 Enterprise 64-bit.

NOTE: The Listed sound levels apply to standard shipping configurations.

Additional options may result in increased sound levels.

Emissions Classification FCC Rating Class B

CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; Normative **Standards** CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN

60950-1; IEC 60950-1

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is

eligible to bear the appropriate compliance logos and statements.

HP Dynamic Smart Number of PCI Array B140i

links

Four

Controller **PCI link rate**

4 Gb/s

Technical Specifications

Storage protocol SATA

support

SAS/SATA peak 6 Gb/s

data transfer

rate

Number of 10 links

SAS/SATA links

SAS/SATA 2x4 connectors; 2x1 connectors

connectivity

Expander support No

Drives supported Up to 10 Internal Drives

(max)

RAID support 0, 1, 10, 5 SATA Software HP SSA, SMH, SIM

management

Warrantv Server warranty **HP Secure** Not Supported

Encryption license

HP SmartCache Not Supported

License

HP Smart Storage Supported

Administrator

HP Ethernet 1Gb 2- Network port 330i Adapter

Interface

10Base-T/100Base-TX/1000Base-TX

Compatibility IEEE 802.3 10Base-T

> IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX PCI Express, two lanes (x2)

Data Transfer

Method Controller

Rate

BCM5717

Network Transfer 10Base-T (Half-

10 Mb/s per port, 40 Mb/s combined 10Base-T (Full-

Duplex)

Duplex) 20 Mb/s per port, 80 Mb/s combined

100Base-TX (Half-

Duplex) 100 Mb/s per port, 400 Mb/s combined

100Base-TX (Full-

Duplex) 200 Mb/s per port, 800 Mb/s combined

100Base-TX (Half-

Duplex) 1000Mb/s per port, 4000 Mb/s combined

100Base-TX (Full-

Duplex) 2000Mb/s per port, 8000 Mb/s combined

Connector **RJ-45**

Cable Support 10 Base-T Categories 3, 4 or 5 UTP; up to 328 ft (100 m)

10/100/1000 Base-TX Category 5 or higher UTP; up to 328 ft (100 m)

SOIQUITORK 54062-6971 (21) 4062-6971 (31) 4062-6971 (41) 4062-6971 (48) 4062-6971 (51) 4062-6971 (61) 4062-6971 (71) 4062-7479 HP ProLiant ML110 Generation (Genq)

Technical Specifications

Environmentfriendly Products and Approach

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green. To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Summary of Changes

| Date | Version History | Action | Description of Change |
|-------------|---------------------|---------|---|
| 28-Sep-2015 | From Version 4 to 5 | Added | Added new 6Gb SATA Solid State Drives. |
| | | Removed | Obsolete SKUs were removed from the QuickSpecs. |
| 17-Aug-2015 | From Version 3 to 4 | Changed | Rear view image was replaced. |
| | | | Additional Options was revised. |
| | | Removed | Obsolete SKUs were removed from the QuickSpecs. |
| 1-Jun-2015 | From Version 2 to 3 | Added | New Hard Drives were added to Core Options. HP Insight Software section was added to Additional Options. Optional Software was added to HP Storage Controllers. |
| | | Changed | Standard Features was revised. HP Storage Controllers and HP Disk Backup were revised. |
| | | Removed | Obsolete SKUs were removed from the QuickSpecs. |
| 24-Apr-2015 | From Version 1 to 2 | Added | Smart Buy models added to the NA version only. |



© Copyright 2015 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less